



**DFR - DISPLACEMENT FLOW RECESSED DIFFUSER**

**OPENING DETAIL**


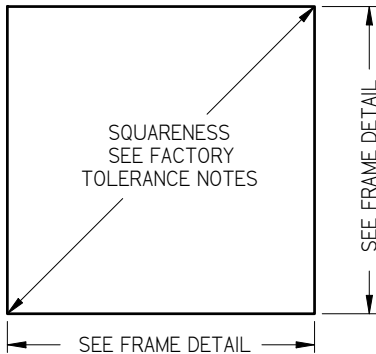


DIFFERENCE BETWEEN DIAGONALS CANNOT EXCEED 0.172" (4)


**ISOMETRIC VIEW**

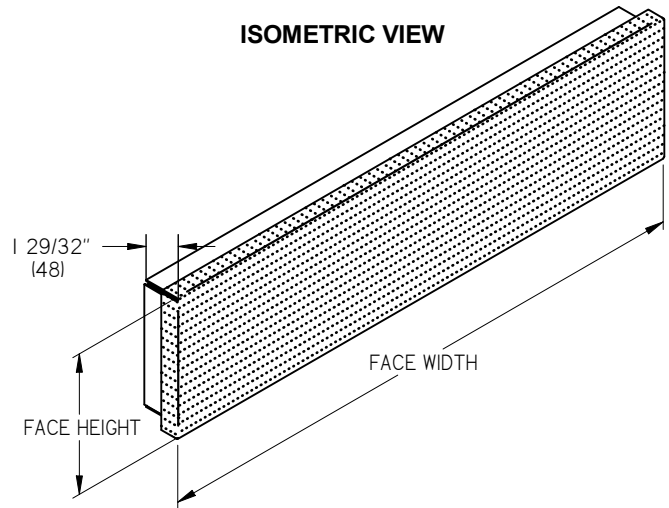

**STANDARD SURFACE MOUNT DETAIL**

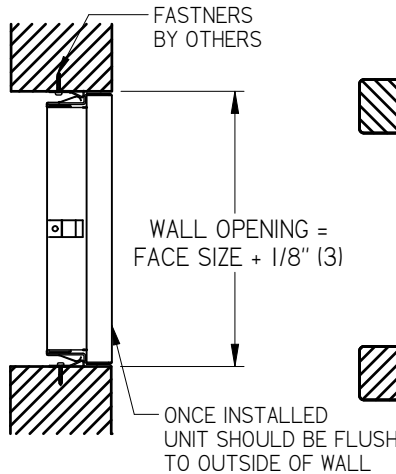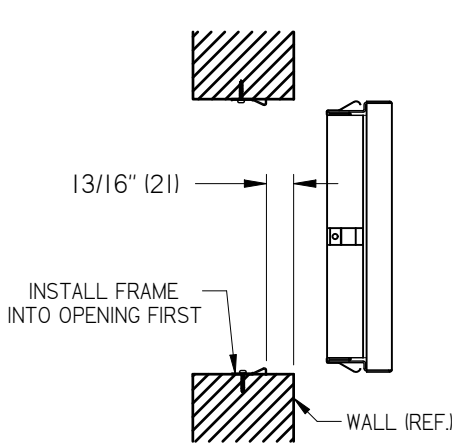

**OPTIONAL MUD FRAME(MF) MOUNTING DETAIL**

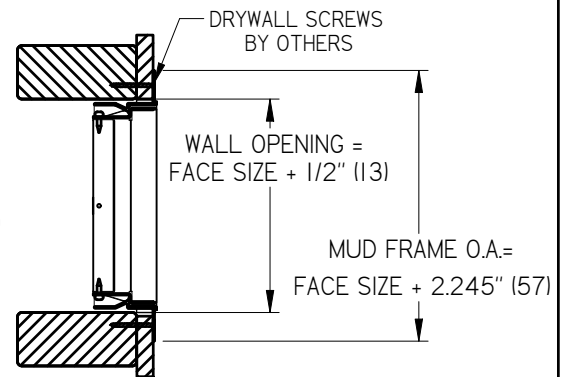

**NOTE:**

- MINIMUM 6" X 4" (152 X 102)
- MAXIMUM 60" X 42" (1524 X 1067)
- ALL UNITS COME WITH AN INTERNAL BAFFLE
- MUD FRAME, INSTALLATION FRAME AND INNER BAFFLE ARE NOT PAINTED

**FACTORY TOLERANCE:**

- OVERALL FACE DIMENSIONS ± 1/16" (2)
- SQUARENESS ± 0.086" (2) OF PERFECT SQUARE

**STANDARD MATERIALS:**

- PERFORATED FRONT PANEL - 18 GA. STEEL
- INSTALLATION FRAME - 24 GA. STEEL
- MUD FRAME- EXTRUDED ALUMINUM

**OPTIONAL:**

- MF - MUD FRAME

**FACE FINISH:**

- F - B12 STANDARD WHITE
- F - B15 METALLIC GREY
- F - B17 BLACK
- F - B25 BAKED ENAMEL TO MATCH SAMPLE
- F - SPL SPECIAL FINISH

ALL METRIC DIMENSIONS ( ) ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

**PROJECT:**

**ENGINEER:**

**CUSTOMER:**

**SUBMITTAL DATE:**

**SPEC. SYMBOL:**

**PRICE**

*PS*

**269413**

2022-09-14

**DFR**

**DISPLACEMENT FLOW RECESSED DIFFUSER**