

FCVC

VERTICAL CONCEALED FAN COIL



Typical Applications


Ideal for installations in hotels, condominiums, and commercial spaces, the FCVC is designed for concealed, ducted installations.

STANDARD CONSTRUCTION

- + 20 GA galvanized steel casing
- + Removable fan and motor
- + Easily removable MERV3 disposable filter
- + Double width double Inlet (DWDI) direct driven blower
- + Galvanized steel, insulated drainpan

OPTIONAL FEATURES

- + 3-speed fan relay board
- + Multiple coil configurations
- + Stainless steel drain pan with external insulation
- + Drain pan safety overflow connection

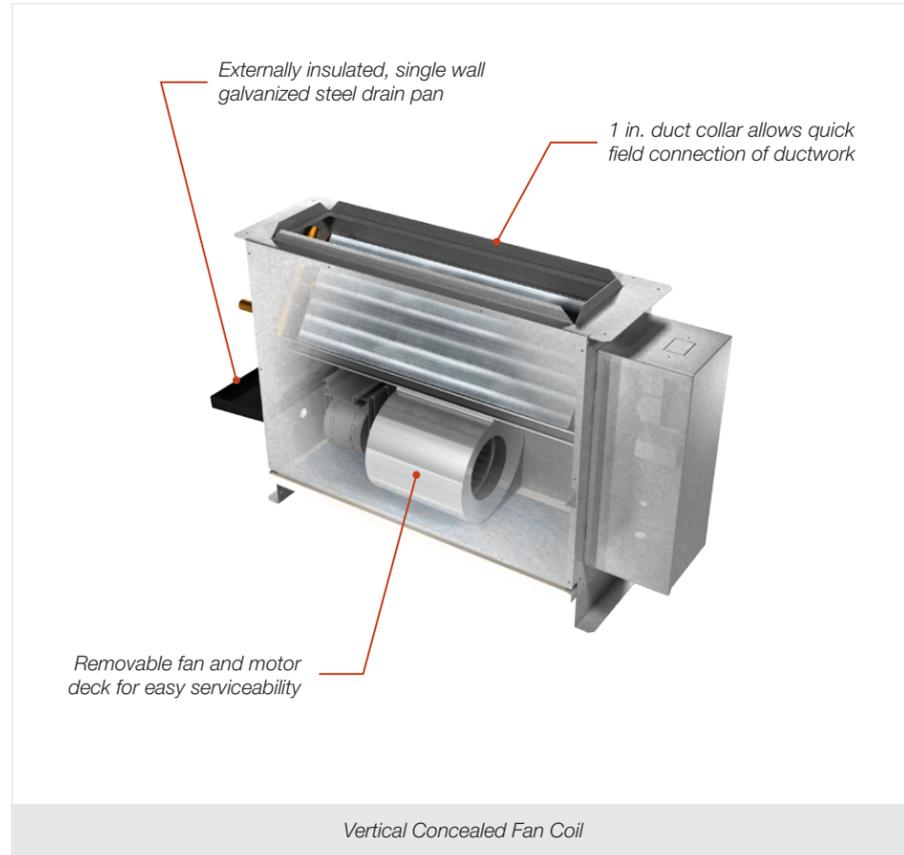

Product Highlights

The FCVC is a vertical blow-through fan coil designed for concealed, wall-mounted installation. Quiet, energy-efficient operation, a variety of options, and the ability to accommodate a range of heating and cooling loads make this unit suitable for many applications.

Energy Efficiency

- + The FCVC comes standard with an ETL listed, 3-speed PSC motor while an optional ECM provides increased energy efficiency with 3-speed or full modulating control.
- + The fully insulated casing reduces heat loss to/from the conditioned air to improve efficiency. Insulation options including fiberglass, foil faced fiberglass, and fiber free foam are available to best suit the needs of each application.


Easy Installation and Maintenance

- + An optional quick connect motor wire harness, factory mounted disconnect switch, and motor fusing are available to make installation and maintenance quick and easy.

Customizable Water Coil Configurations

- + The FCVC is AHRI 410 certified and features water coils with high quality copper tube and aluminum fin construction.
- + For optimal performance and versatility, water coils are available in RH and LH configurations with the following circuiting options:
 - 2 pipe system: 1-4 rows
 - 4 pipe system: 3-4 rows cooling and 1-2 rows heating, maximum 5 rows

Dimensional Data

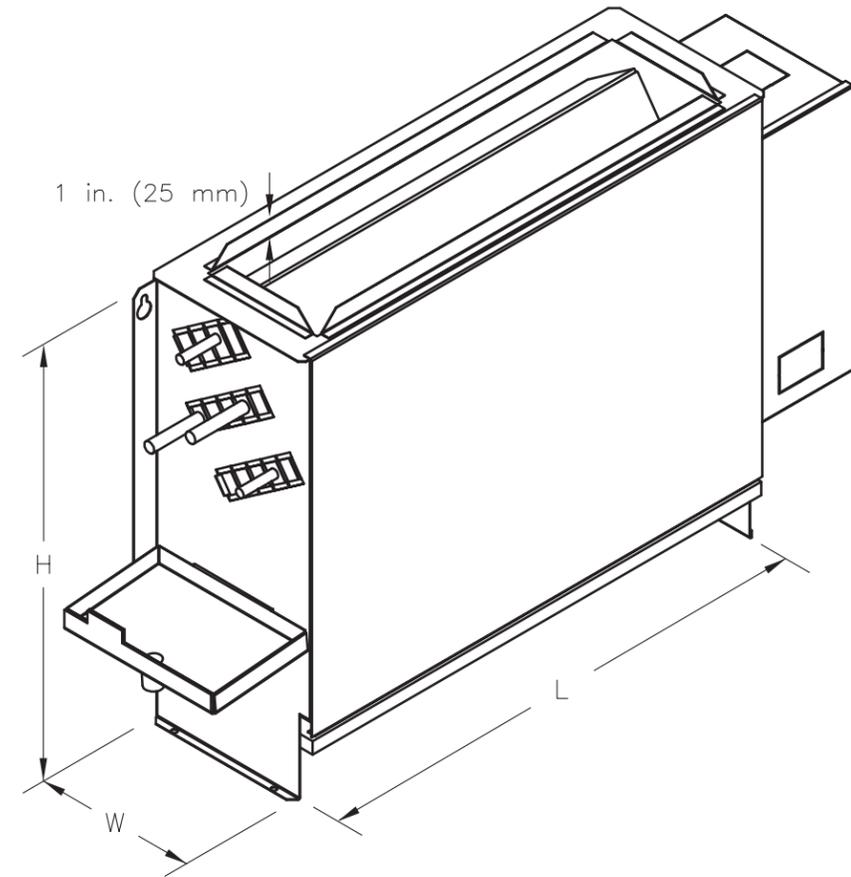

Size	Length (L)	Width (W)	Height (H)
02	21 in. (534 mm)	10 in. (255 mm)	24 7/8 in. (632 mm)
03	29 in. (737 mm)		
04			
06	40 in. (1016 mm)		
08	45 in. (1143 mm)		
10	55 in. (1397 mm)		
12	65 in. (1651 mm)		



Product Improvement is a continuing endeavour at Price. Therefore, specifications are subject to change without notice. Consult your Price Sales Representative for current specifications or more detailed information. Not all products may be available in all geographic areas. All goods described in this document are warranted as described in the Limited Warranty shown at priceindustries.com. The complete Price product catalog can be viewed online at priceindustries.com.