


MSBL - MEDIUM SECURITY BENT LOUVER

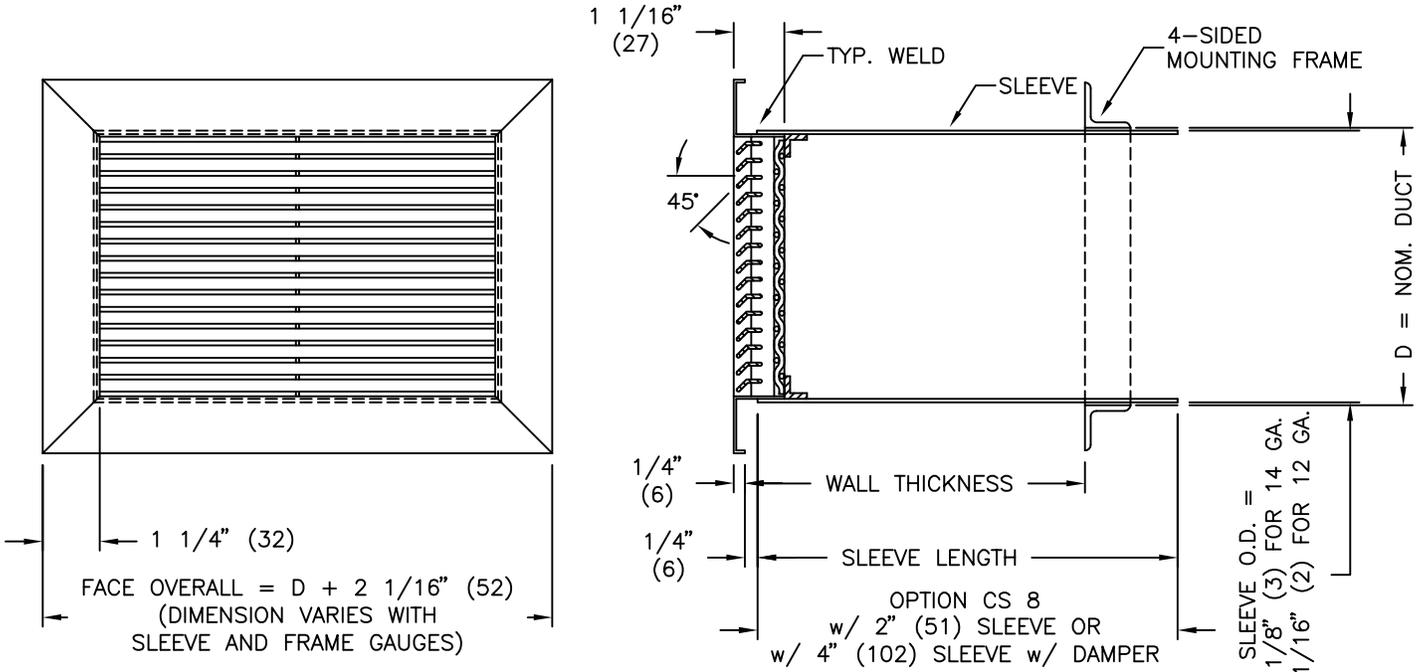

STANDARD CONSTRUCTION:

FRAME:

FP16 16 GA. HOT ROLLED STEEL (HRS) WITH REINFORCED MITRED CORNERS

- OPTION:
 FP14 14 GA.

LOUVERS:

STANDARD CORE STYLE C7: 14 GA. LOUVERS ON 3/8" (10) CENTERS, 45° DEFLECTION WITH INTERLOCKING VERTICAL SUPPORT MULLIONS ON 6" (152) CENTERS

- OPTION:
 CORE STYLE C8: 14 GA. ON 3/4" CENTERS, 45° DEFLECTION

WIRE MESH:

WM 10 GA. X 3/8" (10) CLEAR OPENING STEEL WIRE MESH

SLEEVE:

S14 14 GA. HRS SLEEVE (LENGTH AS REQUIRED) STITCH WELDED SEAMS

- OPTIONS:
 S12 12 GA. HRS. SLEEVE
 CWS CONTINUOUSLY WELDED SEAMS
 OPTION S5 (NOT AVAILABLE WITH MOUNTING FRAME - MF)

4-SIDED MOUNTING FRAME:

MF3 1" x 1" x 1/8" (25 x 25 x 3) HRS ANGLE (SHIPPED LOOSE FOR FIELD WELDING)

- OPTIONS:
 MF1 MF2 MF4

FINISH:

- B12 WHITE
 (OPTIONAL FINISHES AVAILABLE)

OPTIONS & ACCESSORIES:

FASTENING METHOD OPTIONS:

- MR6 MR7
 CS 8 SPNR-SS CS 8 TORX-SS

DAMPER OPTIONS:

- 3BR - VOLUME DAMPER, REAR OPERATED

BARRIER BAR STYLE OPTIONS:

- BB16 BB17 BB18 BB19
 BB20 BB21 BB22 BB23

TRANSFER GRILLE CONSTRUCTION OPTIONS:

- TGCS

NOTES:

- BARRIER BARS AND MOUNTING FRAMES ARE NOT AVAILABLE WITH OPTION CS 12
- MINIMUM SIZE = 6" x 6" (152 x 152)
- MAXIMUM SIZE = 30" x 30" (762 x 762)
- FACTORY TOLERANCE ±1/32" (1)
- SLEEVE LENGTH MUST BE SPECIFIED ON ORDER
- REFER TO SUBMITTAL 233035 FOR OPTIONS
- CONSULT FACTORY FOR SPECIAL OPTIONS

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

| | | | |
|------------------------|----------------------|---------------|---|
| PROJECT: | | PRICE® | |
| ENGINEER: | | <i>MG</i> | MSBL MEDIUM SECURITY BENT LOUVER |
| CUSTOMER: | | 233042 | |
| SUBMITTAL DATE: | SPEC. SYMBOL: | 2013/10/21 | |