

NOTES:




- CONSTRUCTED FROM 18GA GALVANIZED STEEL
- FULLY INSULATED MATCHING UNIT LINER
- HEAVY GAUGE OPPOSED BLADE STEEL DAMPERS CONNECTED BY DRIVE ROD
- SLIP AND DRIVE CONNECTION FOR QUICK INSTALLATION TO BLOWER COIL
- DAMPER DRIVE SHAFT HANDING TO MATCH CONTROLS LOCATION
- MIXING BOX SHIPS SEPARATE FROM UNIT

OPTIONS:


- LOW LEAK DAMPERS (LLD)
- SIDE ACCESS PANELS (MBA)

24V ACTUATOR:


- NONE
- FLOATING (ACT-F)
- 0-10V MODULATING (ACT-M)

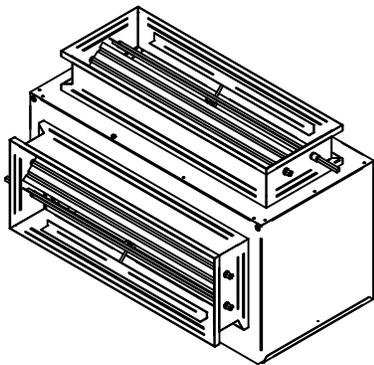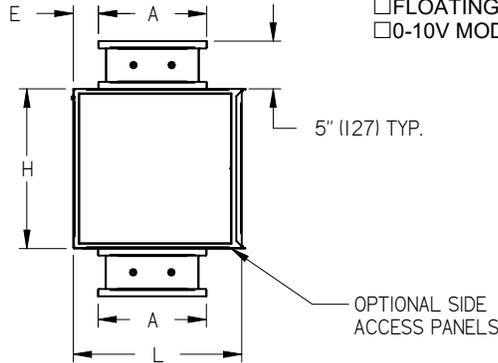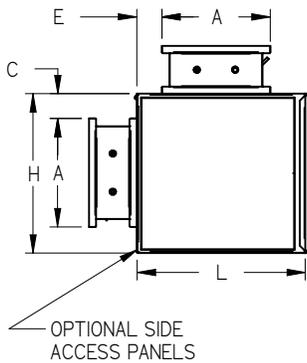

MB-RT (REAR/TOP) CONFIGURATION

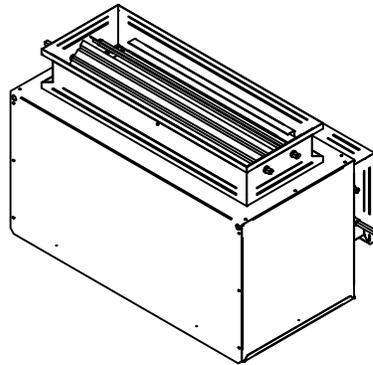

MB-RB (REAR/BOTTOM) CONFIGURATION

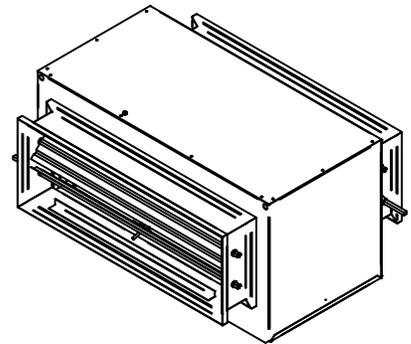



MB-TB (TOP/BOTTOM) CONFIGURATION

UNIT SIZE	A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	L in. (mm)	W in. (mm)	H in. (mm)
08	9 1/4 (235)	16 1/4 (413)	2 1/8 (54)	2 1/8 (54)	1 5/8 (41)	14 1/8 (359)	20 1/4 (514)	13 1/4 (337)
12		24 1/4 (616)			1 7/8 (48)	17 7/8 (454)	28 1/4 (718)	16 3/4 (425)
16	11 1/4 (286)	30 1/4 (768)	2 3/8 (60)	3 1/4 (83)	2 7/8 (73)	23 5/8 (600)	34 1/4 (870)	22 3/4 (578)
20		36 1/4 (921)					40 1/4 (1022)	
30	16 1/4 (413)	37 1/4 (946)	3 3/8 (86)				41 1/4 (1048)	
40		48 (1219)				54 1/4 (1378)		


ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		 BCHD BLOWER COIL HORIZONTAL DIRECT DRIVE MIXING BOX
ENGINEER:		
CUSTOMER:		
SUBMITTAL DATE:	SPEC. SYMBOL:	
		<i>TW</i> 254944 04/01/2024

SPRING HANGER BRACKET LOCATIONS

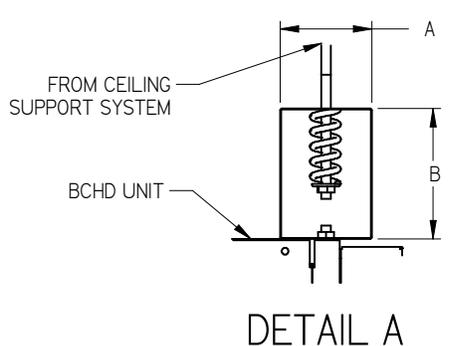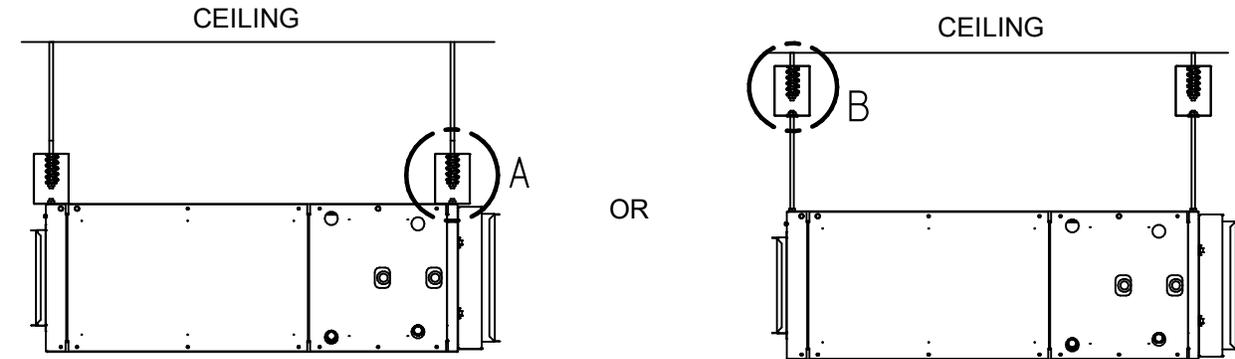

Spring Color	A in. (mm)	B in. (mm)
SMALL YELLOW & PINK	2 1/5 (55)	3 1/2 (89)

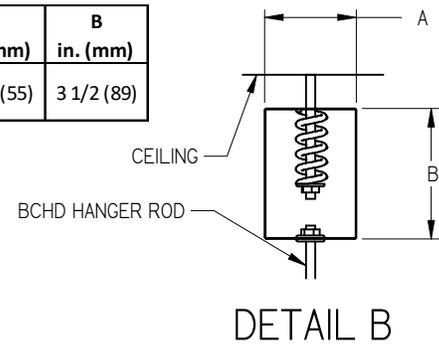

BCHD SPRING BRACKET COLORS - BASE UNIT										
Size	1 Row	2 Row	3 Row	4 Row	5 Row	6 Row	7 Row	8 Row	9 Row	10 Row
08	SMALL YELLOW									
12	SMALL YELLOW									
16	SMALL YELLOW	PINK	PINK	PINK	PINK					
20	SMALL YELLOW	SMALL YELLOW	PINK							
30	PINK									
40	PINK									


NOTES:

- RED SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 39 LB
- SMALL YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 68 LB
- PINK SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 177 LB
- LARGE YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 295 LB
- SPRING BRACKETS ARE SHIPPED LOOSE FOR FIELD INSTALLATION
- ORIENT THE ISOLATOR AS SHOWN TO PROPERLY DAMPEN BLOWER COIL


ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE	
ENGINEER:		<i>TW</i>	BCHD BLOWER COIL HORIZONTAL DIRECT DRIVE SPRING HANGER BRACKET INSTALLATION BASE UNIT
CUSTOMER:		264588	
SUBMITTAL DATE:	SPEC. SYMBOL:	04/01/2024	

SPRING HANGER BRACKET LOCATIONS

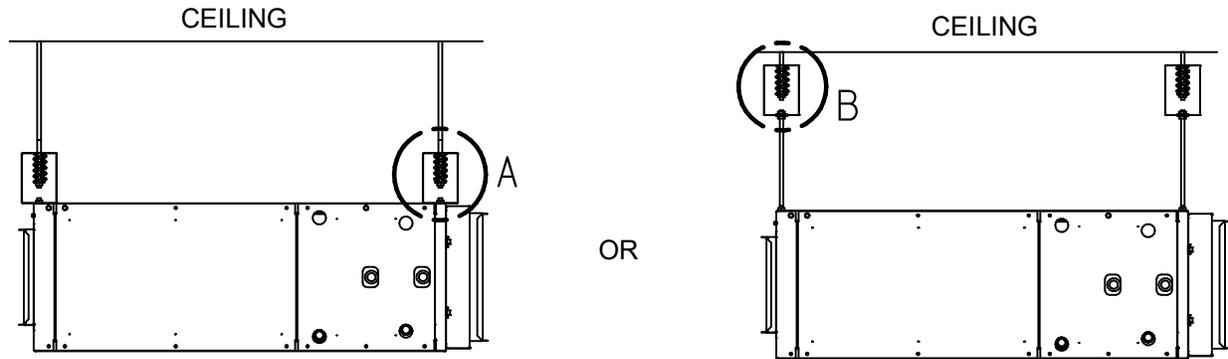

OR

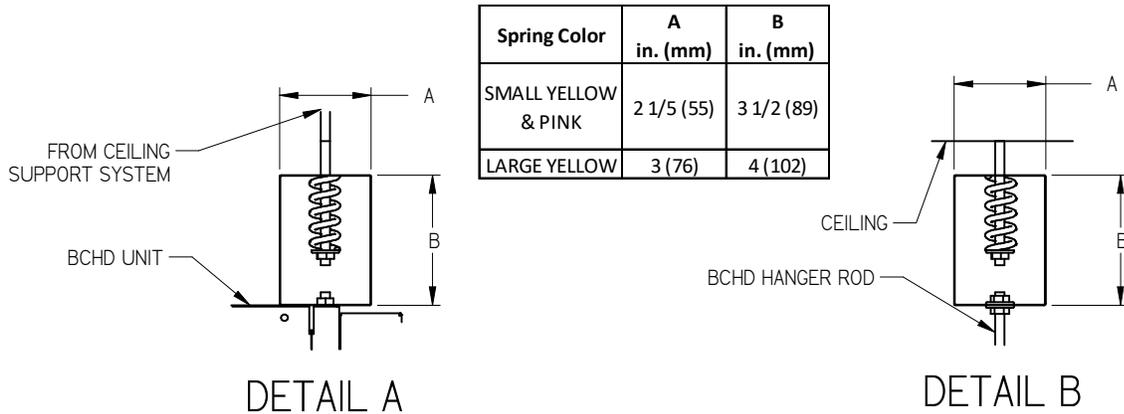

Spring Color	A in. (mm)	B in. (mm)
SMALL YELLOW & PINK	2 1/5 (55)	3 1/2 (89)
LARGE YELLOW	3 (76)	4 (102)

BCHD SPRING BRACKET COLORS - WITH SM LINER										
Size	1 Row	2 Row	3 Row	4 Row	5 Row	6 Row	7 Row	8 Row	9 Row	10 Row
08	SMALL YELLOW	PINK								
12	SMALL YELLOW	SMALL YELLOW	PINK							
16	PINK									
20	PINK									
30	PINK									
40	PINK	PINK	PINK	PINK	LARGE YELLOW					


NOTES:

- RED SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 39 LB
- SMALL YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 68LB
- PINK SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 177 LB
- LARGE YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 295 LB
- SPRING BRACKETS ARE SHIPPED LOOSE FOR FIELD INSTALLATION
- ORIENT THE ISOLATOR AS SHOWN TO PROPERLY DAMPEN BLOWER COIL

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE	
ENGINEER:		<i>TW</i>	BCHD BLOWER COIL HORIZONTAL DIRECT DRIVE SPRING HANGER BRACKET INSTALLATION W/ SM LINER
CUSTOMER:			
SUBMITTAL DATE:	SPEC. SYMBOL:	04/01/2024	

SPRING HANGER BRACKET LOCATIONS

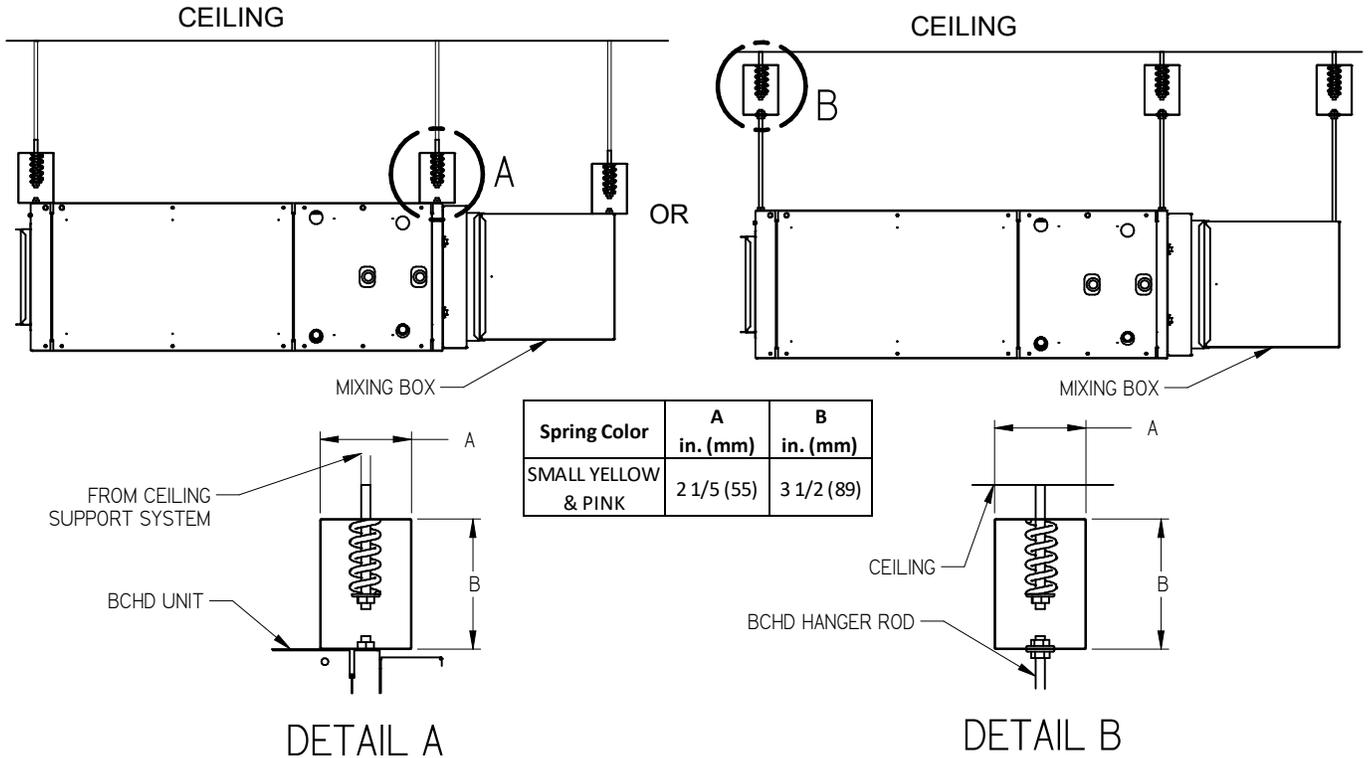

BCHD SPRING BRACKET COLORS - WITH MIXING BOX											
Size	1 Row	2 Row	3 Row	4 Row	5 Row	6 Row	7 Row	8 Row	9 Row	10 Row	Mixing Box Bracket
08	SMALL YELLOW										
12	SMALL YELLOW										
16	SMALL YELLOW	PINK	PINK	PINK	PINK	SMALL YELLOW					
20	SMALL YELLOW	SMALL YELLOW	PINK	SMALL YELLOW							
30	PINK	SMALL YELLOW									
40	PINK	SMALL YELLOW									


NOTES:

- RED SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 39 LB
- SMALL YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 68LB
- PINK SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 177 LB
- LARGE YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 295 LB
- SPRING BRACKETS ARE SHIPPED LOOSE FOR FIELD INSTALLATION
- ORIENT THE ISOLATOR AS SHOWN TO PROPERLY DAMPEN BLOWER COIL

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE	
ENGINEER:		<i>TW</i>	BCHD BLOWER COIL HORIZONTAL DIRECT DRIVE SPRING HANGER BRACKET INSTALLATION W/ MIXING BOX
CUSTOMER:		264588	
SUBMITTAL DATE:	SPEC. SYMBOL:	04/01/2024	

SPRING HANGER BRACKET LOCATIONS

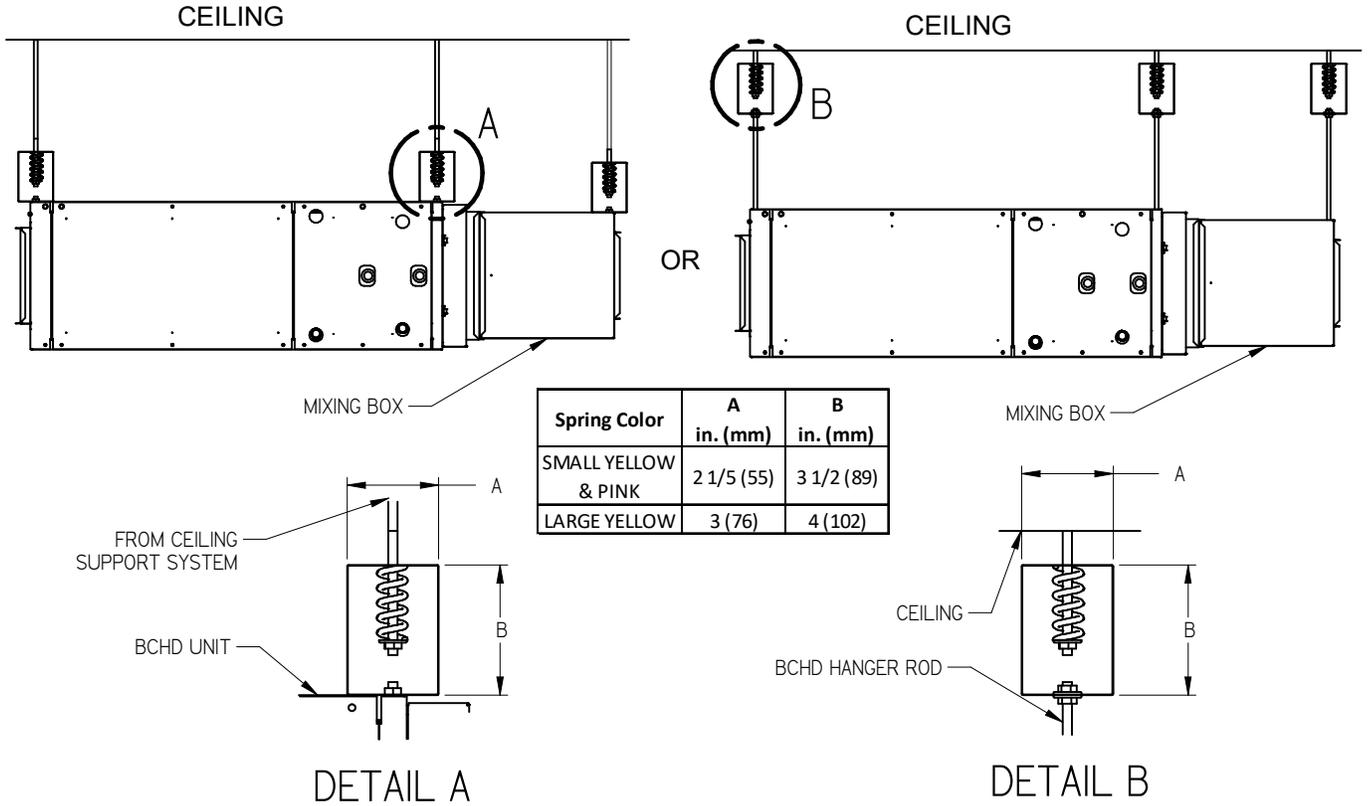

BCHD SPRING BRACKET COLORS - WITH SM LINER & MIXING BOX											
Size	1 Row	2 Row	3 Row	4 Row	5 Row	6 Row	7 Row	8 Row	9 Row	10 Row	Mixing Box Bracket
08	SMALL YELLOW	PINK	SMALL YELLOW								
12	SMALL YELLOW	SMALL YELLOW	PINK	SMALL YELLOW							
16	PINK	SMALL YELLOW									
20	PINK	SMALL YELLOW									
30	PINK	SMALL YELLOW									
40	PINK	PINK	PINK	PINK	LARGE YELLOW	SMALL YELLOW					



NOTES:

- RED SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 39 LB
- SMALL YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 68LB
- PINK SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 177 LB
- LARGE YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 295 LB
- SPRING BRACKETS ARE SHIPPED LOOSE FOR FIELD INSTALLATION
- ORIENT THE ISOLATOR AS SHOWN TO PROPERLY DAMPEN BLOWER COIL

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE	
ENGINEER:		<i>TW</i>	BCHD BLOWER COIL HORIZONTAL DIRECT DRIVE SPRING HANGER BRACKET INSTALLATION W/ SM LINER & MIXING BOX
CUSTOMER:		264588	
SUBMITTAL DATE:	SPEC. SYMBOL:	04/01/2024	

SPRING HANGER BRACKET LOCATIONS

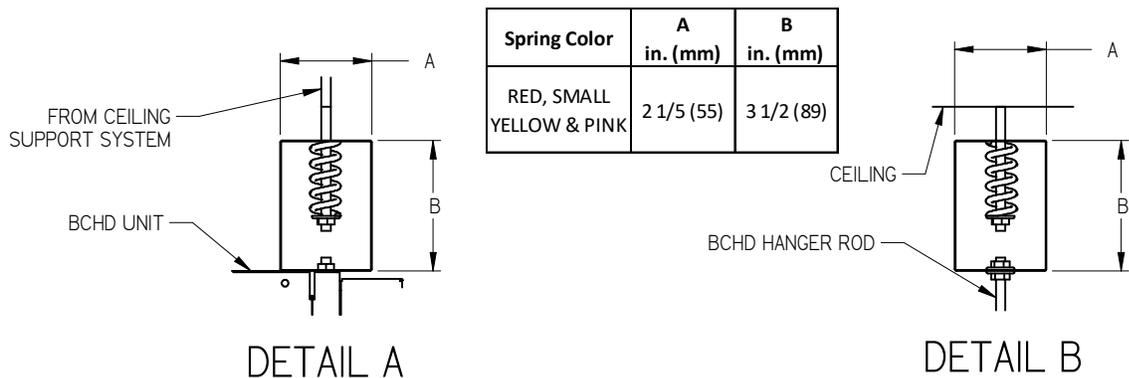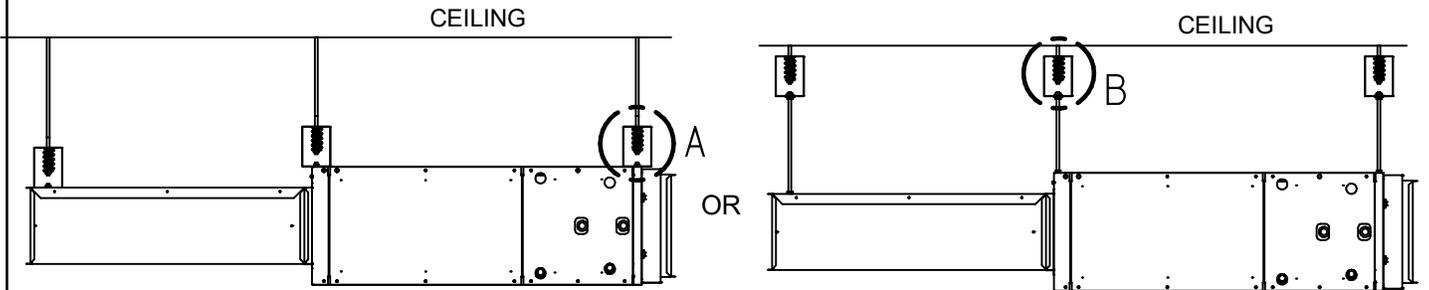

Spring Color	A in. (mm)	B in. (mm)
RED, SMALL YELLOW & PINK	2 1/5 (55)	3 1/2 (89)

BCHD SPRING BRACKET COLORS - DISCHARGE SILENCER											
Size	1 Row	2 Row	3 Row	4 Row	5 Row	6 Row	7 Row	8 Row	9 Row	10 Row	Discharge Silencer Bracket
08	SMALL YELLOW	RED									
12	SMALL YELLOW	RED									
16	SMALL YELLOW	PINK	PINK	PINK	PINK	RED					
20	SMALL YELLOW	SMALL YELLOW	PINK	RED							
30	PINK	SMALL YELLOW									
40	PINK	SMALL YELLOW									


NOTES:

- RED SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 39 LB
- SMALL YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 68LB
- PINK SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 177 LB
- LARGE YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 295 LB
- SPRING BRACKETS ARE SHIPPED LOOSE FOR FIELD INSTALLATION
- ORIENT THE ISOLATOR AS SHOWN TO PROPERLY DAMPEN BLOWER COIL


ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE	
ENGINEER:		<i>TW</i>	BCHD BLOWER COIL HORIZONTAL DIRECT DRIVE SPRING HANGER BRACKET INSTALLATION W/ DISCHARGE SILENCER
CUSTOMER:			
SUBMITTAL DATE:	SPEC. SYMBOL:	04/01/2024	

SPRING HANGER BRACKET LOCATIONS

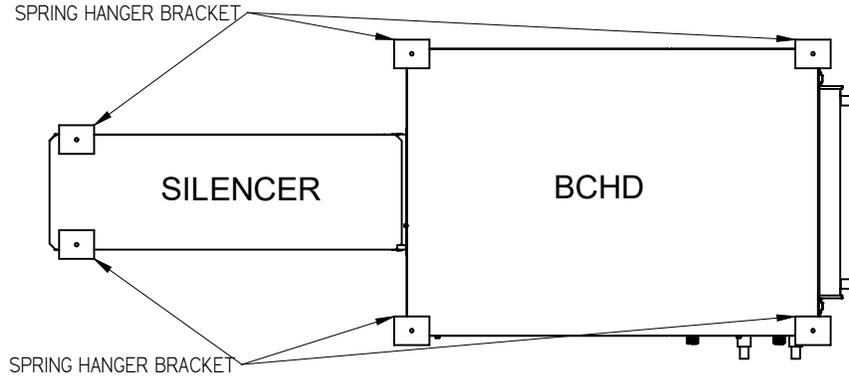

UNIT SIZE 08-20 W/ SILENCER

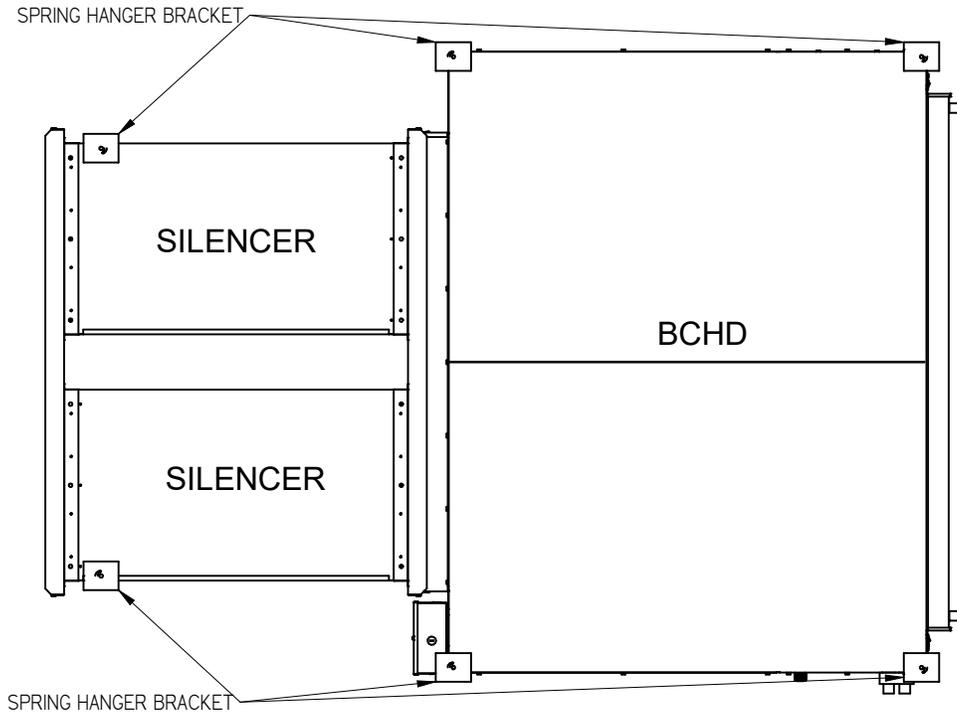

UNIT SIZE 30-40 W/ SILENCER



NOTES:

- RED SPRING HANGER BRACKETS REATED TO A MAXIMUM OF 39 LB
- SMALL YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 68LB
- PINK SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 177 LB
- LARGE YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 295 LB
- SPRING BRACKETS ARE SHIPPED LOOSE FOR FIELD INSTALLATION
- ORIENT THE ISOLATOR AS SHOWN TO PROPERLY DAMPEN BLOWER COIL


ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE	
ENGINEER:		<i>TW</i>	BCHD BLOWER COIL HORIZONTAL DIRECT DRIVE SPRING HANGER BRACKET INSTALLATION W/ DISCHARGE SIELNCER
CUSTOMER:		264588	
SUBMITTAL DATE:	SPEC. SYMBOL:	04/01/2024	

SPRING HANGER BRACKET LOCATIONS

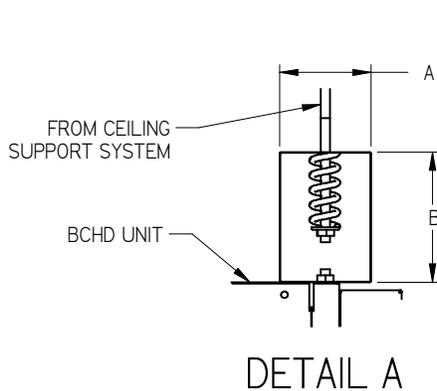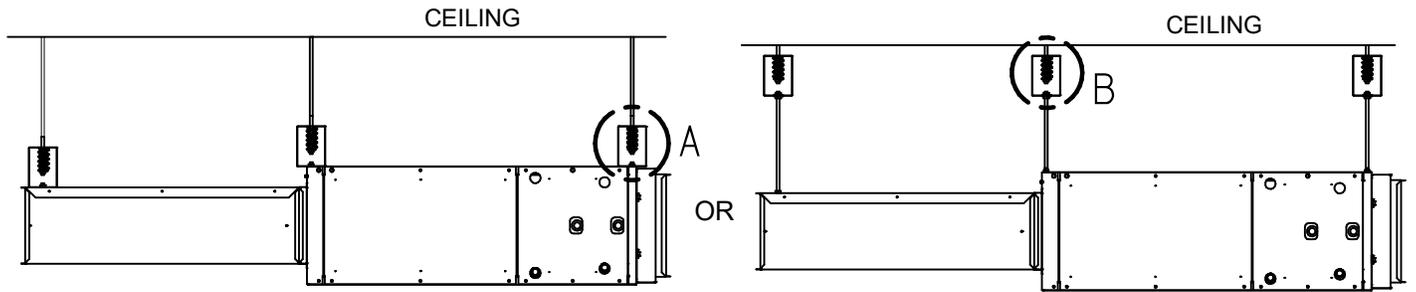

Spring Color	A in. (mm)	B in. (mm)
RED, SMALL YELLOW & PINK	2 1/5 (55)	3 1/2 (89)
LARGE YELLOW	3 (76)	4 (102)

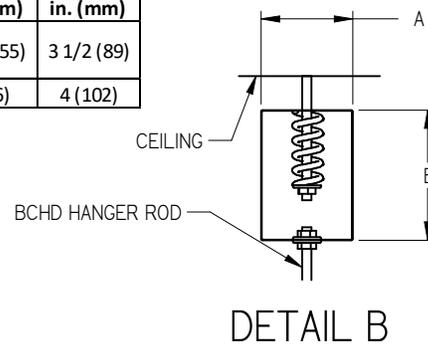

BCHD SPRING BRACKET COLORS - WITH SM LINER & DISCHARGE SILENCER											
Size	1 Row	2 Row	3 Row	4 Row	5 Row	6 Row	7 Row	8 Row	9 Row	10 Row	Discharge Silencer Bracket
08	SMALL YELLOW	PINK	RED								
12	SMALL YELLOW	SMALL YELLOW	PINK	RED							
16	PINK	RED									
20	PINK	RED									
30	PINK	SMALL YELLOW									
40	PINK	PINK	PINK	PINK	LARGE YELLOW	SMALL YELLOW					


NOTES:

- RED SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 39 LB
- SMALL YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 68LB
- PINK SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 177 LB
- LARGE YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 295 LB
- SPRING BRACKETS ARE SHIPPED LOOSE FOR FIELD INSTALLATION
- ORIENT THE ISOLATOR AS SHOWN TO PROPERLY DAMPEN BLOWER COIL

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE	
ENGINEER:		<i>TW</i>	BCHD BLOWER COIL HORIZONTAL DIRECT DRIVE SPRING HANGER BRACKET INSTALLATION W/ SM LINER & DISCHARGE SILENCER
CUSTOMER:		264588	
SUBMITTAL DATE:	SPEC. SYMBOL:	04/01/2024	

SPRING HANGER BRACKET LOCATIONS

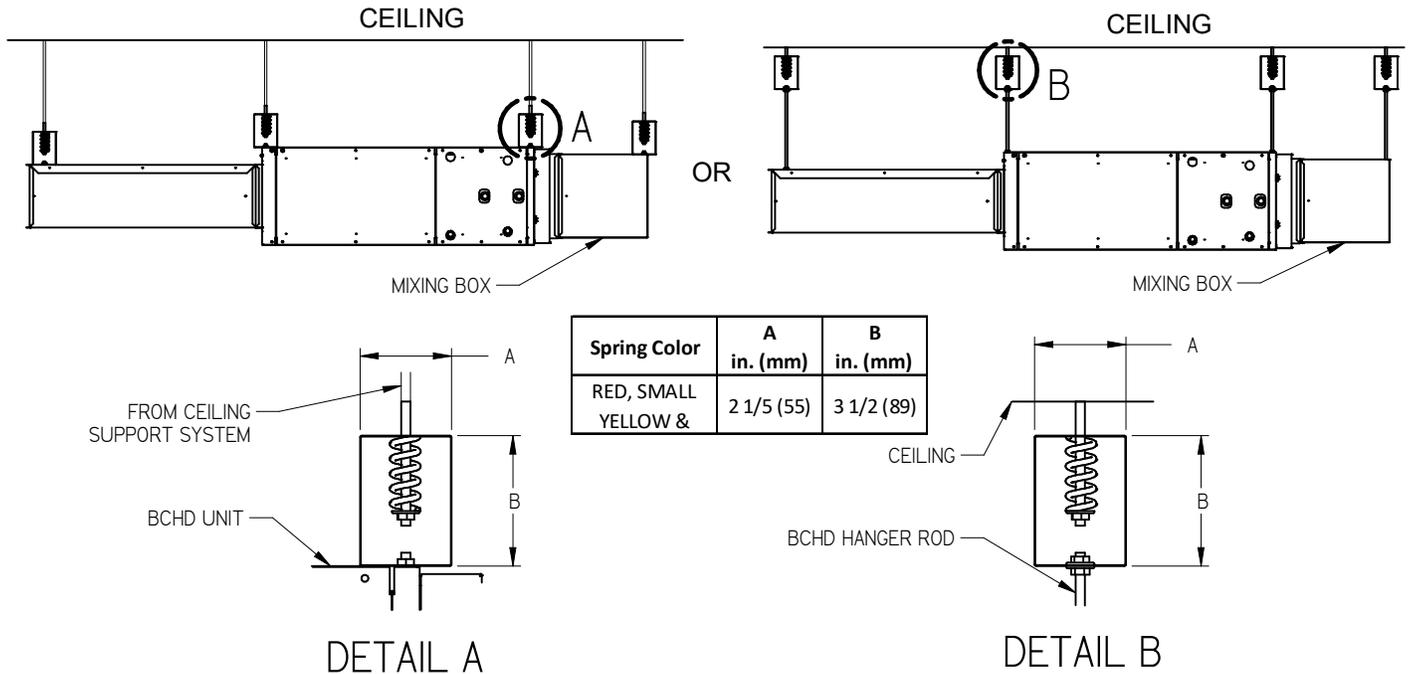

BCHD SPRING BRACKET COLORS - WITH MIXING BOX & DISCHARGE SILENCER												
Size	1 Row	2 Row	3 Row	4 Row	5 Row	6 Row	7 Row	8 Row	9 Row	10 Row	Mixing Box Bracket	Discharge Silencer Bracket
08	SMALL YELLOW	RED										
12	SMALL YELLOW	RED										
16	SMALL YELLOW	PINK	PINK	PINK	PINK	SMALL YELLOW	RED					
20	SMALL YELLOW	SMALL YELLOW	PINK	SMALL YELLOW	RED							
30	PINK	SMALL YELLOW	SMALL YELLOW									
40	PINK	SMALL YELLOW	SMALL YELLOW									


NOTES:

- RED SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 39 LB
- SMALL YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 68LB
- PINK SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 177 LB
- LARGE YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 295 LB
- SPRING BRACKETS ARE SHIPPED LOOSE FOR FIELD INSTALLATION
- ORIENT THE ISOLATOR AS SHOWN TO PROPERLY DAMPEN BLOWER COIL

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE	
ENGINEER:		<i>TW</i>	BCHD BLOWER COIL HORIZONTAL DIRECT DRIVE SPRING HANGER BRACKET INSTALLATION W/ MIXING BOX & DISCHARGE SILENCER
CUSTOMER:		264588	
SUBMITTAL DATE:	SPEC. SYMBOL:	04/01/2024	

SPRING HANGER BRACKET LOCATIONS

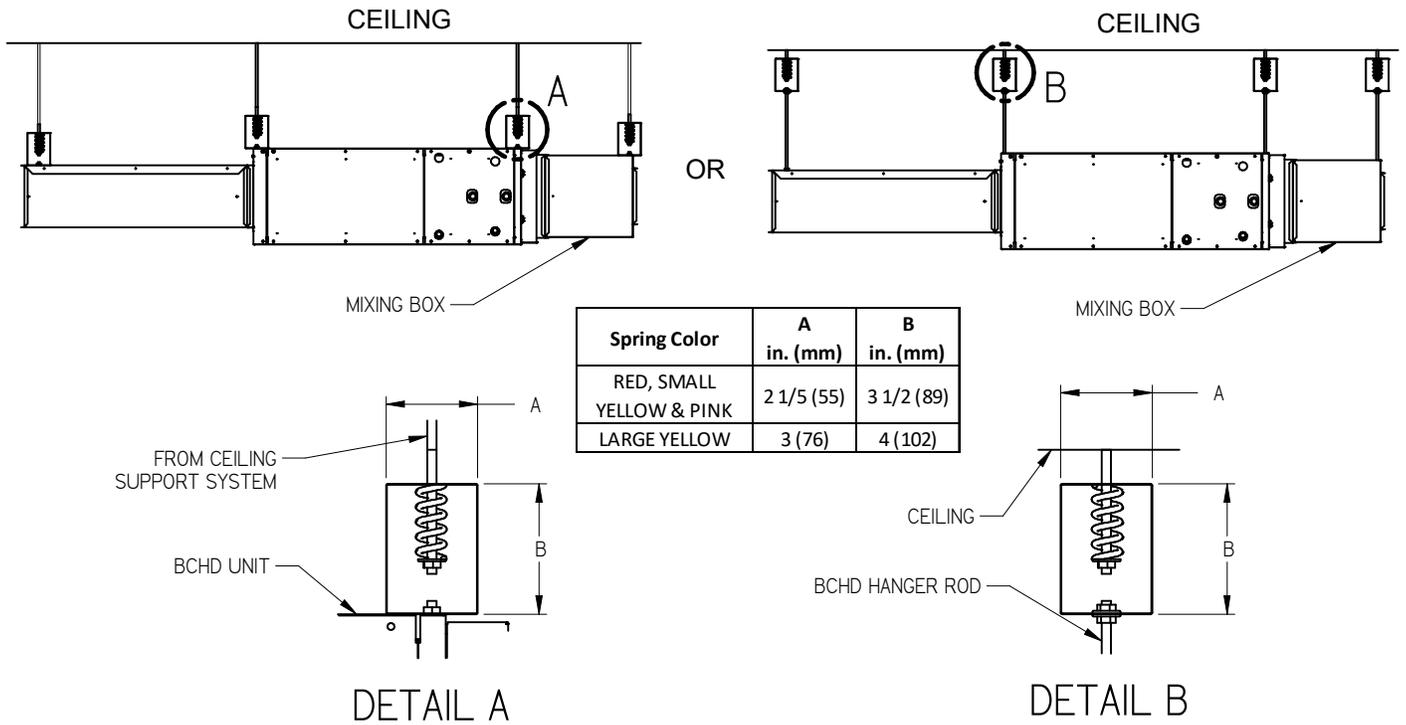


BCHD SPRING BRACKET COLORS - WITH SM LINER, MIXING BOX & DISCHARGE SILENCER												
Size	1 Row	2 Row	3 Row	4 Row	5 Row	6 Row	7 Row	8 Row	9 Row	10 Row	Mixing Box Bracket	Discharge Silencer Bracket
08	SMALL YELLOW	PINK	SMALL YELLOW	RED								
12	SMALL YELLOW	SMALL YELLOW	PINK	SMALL YELLOW	RED							
16	PINK	SMALL YELLOW	RED									
20	PINK	SMALL YELLOW	RED									
30	PINK	SMALL YELLOW	SMALL YELLOW									
40	PINK	PINK	PINK	PINK	LARGE YELLOW	SMALL YELLOW	SMALL YELLOW					

NOTES:

- RED SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 39 LB
- SMALL YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 68LB
- PINK SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 177 LB
- LARGE YELLOW SPRING HANGER BRACKETS RATED TO A MAXIMUM OF 295 LB
- SPRING BRACKETS ARE SHIPPED LOOSE FOR FIELD INSTALLATION
- ORIENT THE ISOLATOR AS SHOWN TO PROPERLY DAMPEN BLOWER COIL

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE	
ENGINEER:		<i>TW</i>	BCHD BLOWER COIL HORIZONTAL DIRECT DRIVE SPRING HANGER BRACKET INSTALLATION W/ SM LINER, MIXING BOX & DISCHARGE SILENCER
CUSTOMER:		264588	
SUBMITTAL DATE:	SPEC. SYMBOL:	04/01/2024	

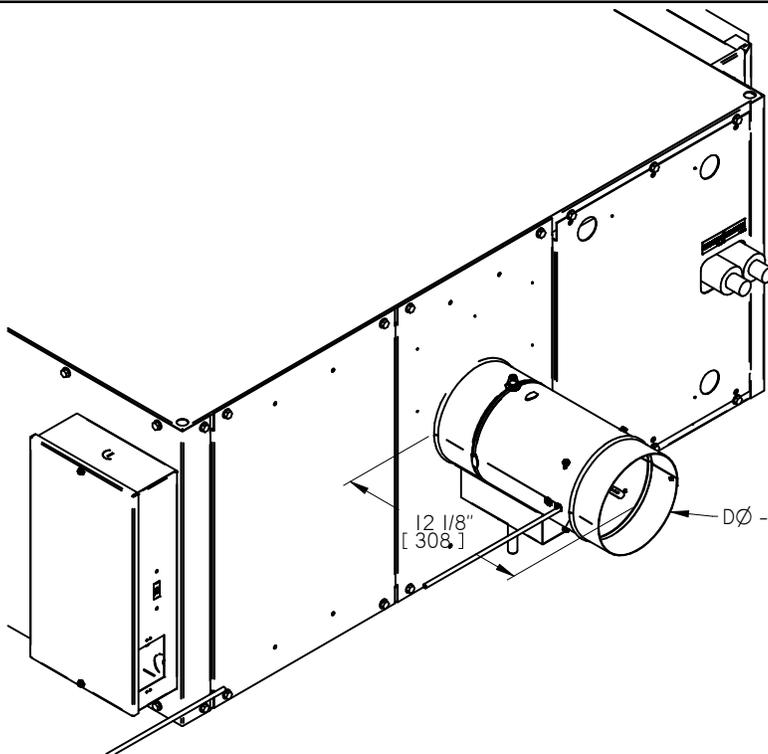


Available Fresh Air Inlet Sizes	
UNIT SIZE	D in. (mm)
08	4, 6, OR 8
12	(102, 152, OR 203)
16	4, 6, 8, OR 10
20	(102, 152, 203, OR 254)
30	6, 8, OR 10
40	(152, 203, OR 254)

FRESH AIR INLET OPTIONS:


- FRESH AIR INLET SIZING
 - 4"
 - 6"
 - 8"
 - 10"
- FRESH AIR INLET HANDING
 - LEFT HAND
 - RIGHT HAND

FRESH AIR INLET NOTES:

1. DUCT IS FABRICATED WITH 22 G.A. GALVANIZED STEEL.
2. OPTIONAL FRESH AIR INLET IS SHOWN ON LEFT HAND SIDE ABOVE.
3. FRESH AIR INLET IS AVAILABLE ON LEFT OR RIGHT HAND OF UNIT.
4. SIDE ACCESS STILL AVAILABLE FOR MAINTENANCE.
5. SIZE 4 HAS 6" DIAMETER DUCT WITH INLET REDUCER SHOWN BELOW.

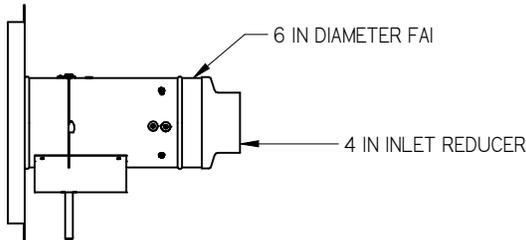



UNIT SIZE	A in. (mm)	B in. (mm)
08	7 7/8 (200)	21 3/4 (553)
12		
16	9 1/2 (241)	
20		
30	12 1/2 (318)	27 1/8 (689)
40		

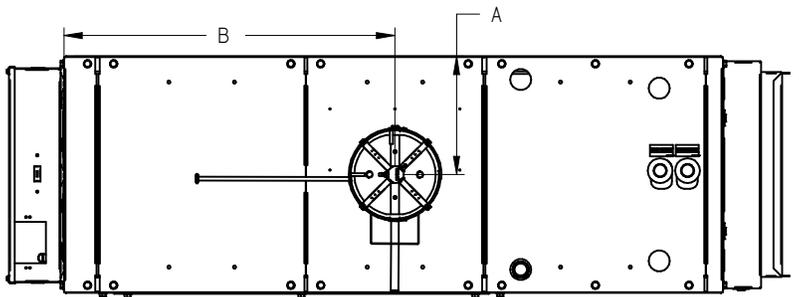

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE	BCHD BLOWER COIL HORIZONTAL W DIRECT DRIVE FRESH AIR INLET
ENGINEER:			
CUSTOMER:		274871	
SUBMITTAL DATE:	SPEC. SYMBOL:	04/01/2024	

UNIT SIZE	B in. (mm)	C in. (mm)
08	12 (305)	10 (254)
12		
16	16 (406)	15 (381)
20		

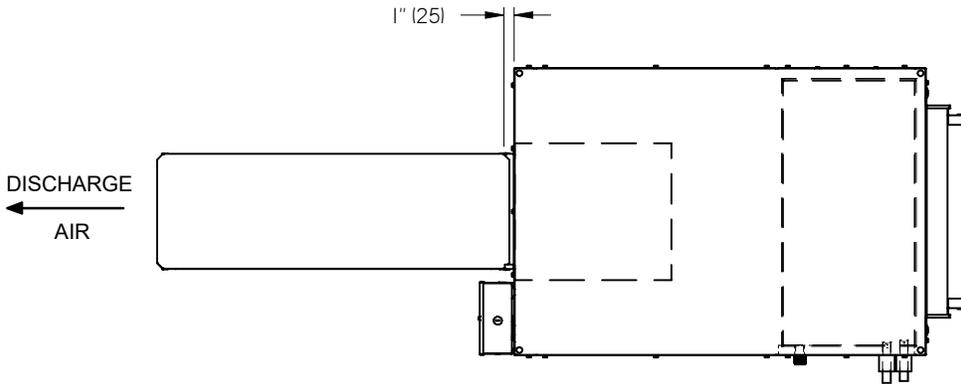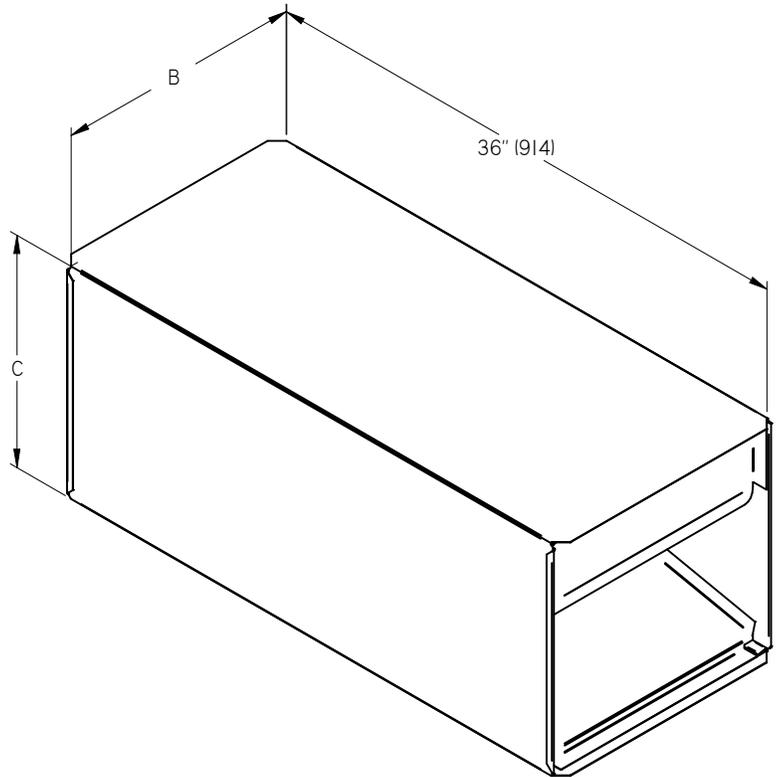

NOTES:

1. 20 G.A. GALVANIZED STEEL HOUSING, MECHANICALLY SEALED LEAK RESISTANCE CONSTRUCTION.
2. DISCHARGE SILENCER SHIPPED LOOSE WITH SLIP AND DRIVE CLEATS WHERE REQUIRED.
3. SLIP AND DRIVE CONNECTIONS (DISCHARGE COLLAR IS PROVIDED).



OPTIONAL LINERS:

- FG - FIBERGLASS
- FC - FIBERGLASS CLOTH
- PL - POLYMER LINER

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE [®]
ENGINEER:		
CUSTOMER:		<i>TW</i>
SUBMITTAL DATE:		276261
SPEC. SYMBOL:		04/01/2024
BCHD BLOWER COIL HORIZONTAL DIRECT DRIVE SILENCER		

UNIT SIZE	B in. (mm)	C in. (mm)
30	35 7/8 (911)	19 7/8 (505)
40	48 7/8 (1241)	21 7/8 (533)

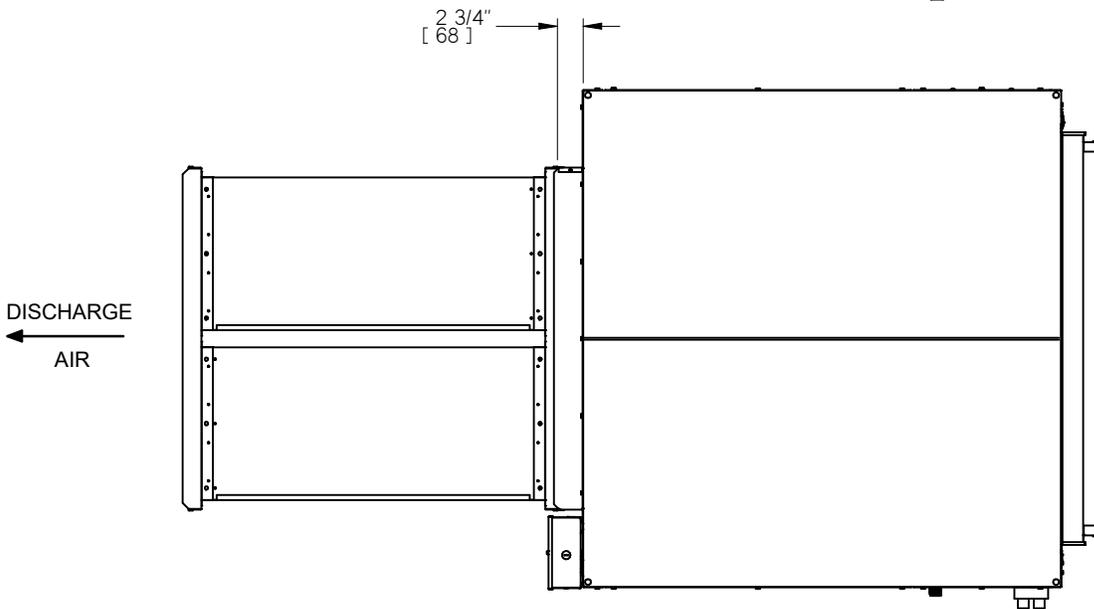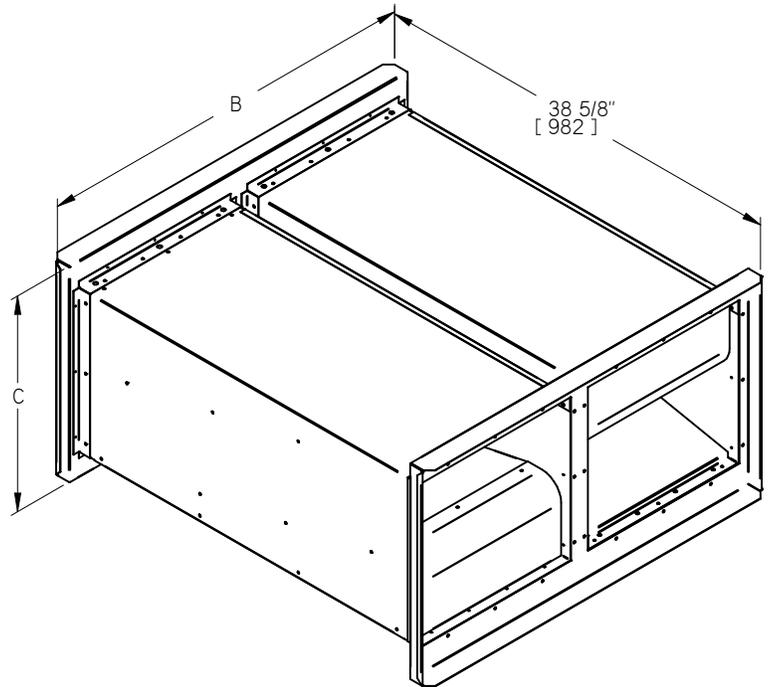

NOTES:



- 20 G.A. GALVANIZED STEEL HOUSING, MECHANICALLY SEALED LEAK RESISTANCE CONSTRUCTION.
- DISCHARGE SILENCER SHIPPED LOOSE WITH SLIP AND DRIVE CLEATS WHERE REQUIRED.
- SLIP AND DRIVE CONNECTIONS (DISCHARGE COLLAR IS PROVIDED).

OPTIONAL LINERS:



- FG - FIBERGLASS
- FC - FIBERGLASS CLOTH
- PL - POLYMER LINER

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE
ENGINEER:		
CUSTOMER:		<i>TW</i>
SUBMITTAL DATE:		276261
SPEC. SYMBOL:		04/01/2024
		BCHD BLOWER COIL HORIZONTAL DIRECT DRIVE SILENCER

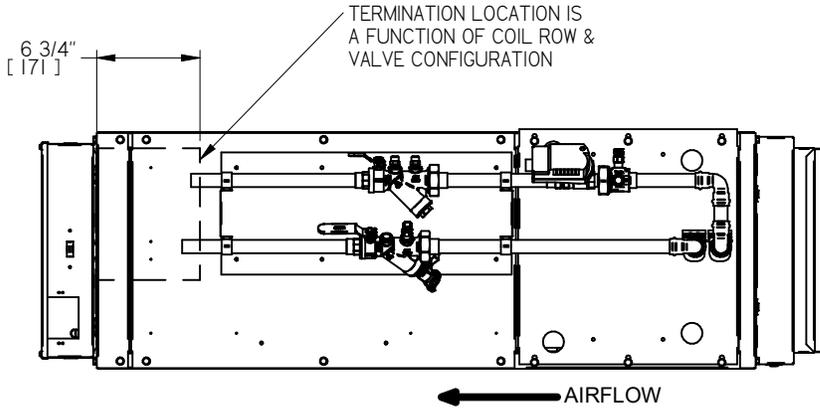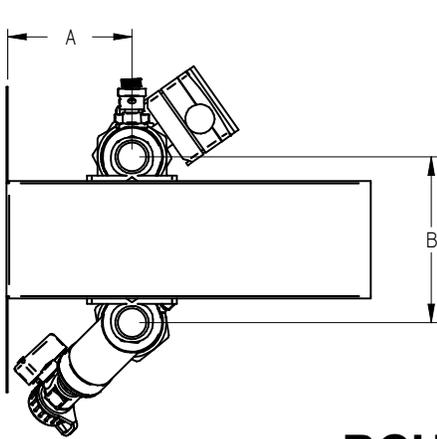

**BCH 2 PIPE CONFIGURATION
2 WAY VALVE PACKAGE**

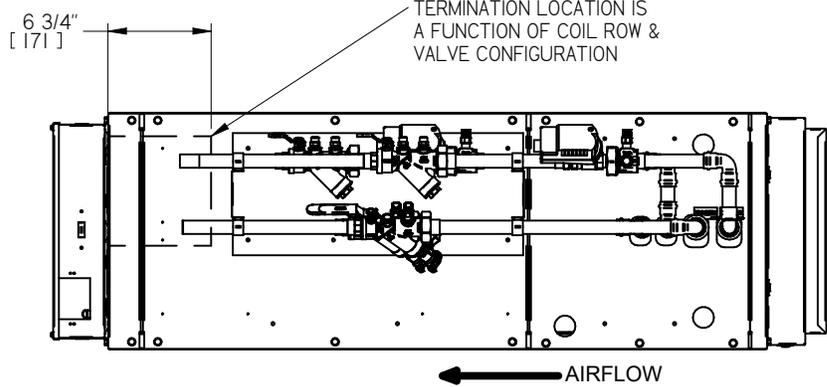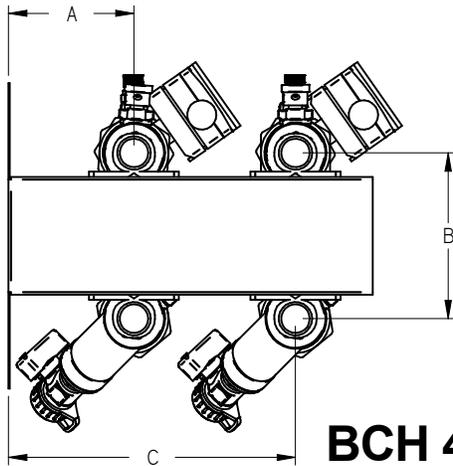

**BCH 4 PIPE CONFIGURATION
2 WAY VALVE PACKAGE**

UNIT SIZE	A in. (mm)	B in. (mm)	C in. (mm)
08	3 1/4 (83)	4 3/8 (111)	7 1/2 (191)
12			
16			
20			
30	3 1/4 (83)	5 5/8 (143)	9 (229)
40			

NOTES:
 •VALVES TO BE ASSEMBLED, TESTED AND SHIPPED AS DEPICTED

ALL METRIC DIMENSIONS () ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

PROJECT:		PRICE
ENGINEER:		
CUSTOMER:		<i>TW</i>
SUBMITTAL DATE:		276262
SPEC. SYMBOL:		04/01/2024

BCHD
 BLOWER COIL HORIZONTAL
 DIRECT DRIVE
 2 WAY PIPING PACKAGE
 2 PIPE & 4 PIPE CONFIG