


**MODEL VCR8 ROUND DAMPER**

DAMPER BLADES IN FULLY CLOSED POSITION.


DAMPER SLEEVE FOR MOUNTING INTO RIGID DUCT.

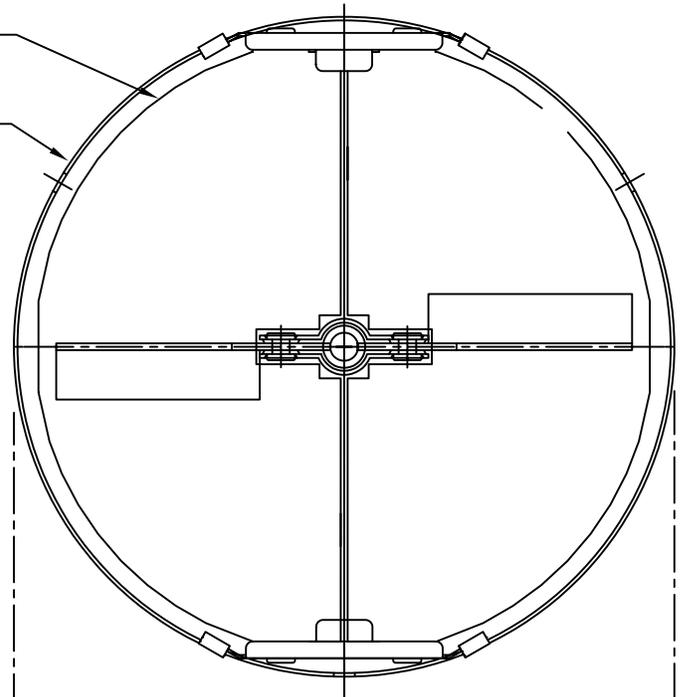

TOP VIEW OF DAMPER

**A** ± 1/16

DAMPER BLADES IN FULLY OPEN POSITION.

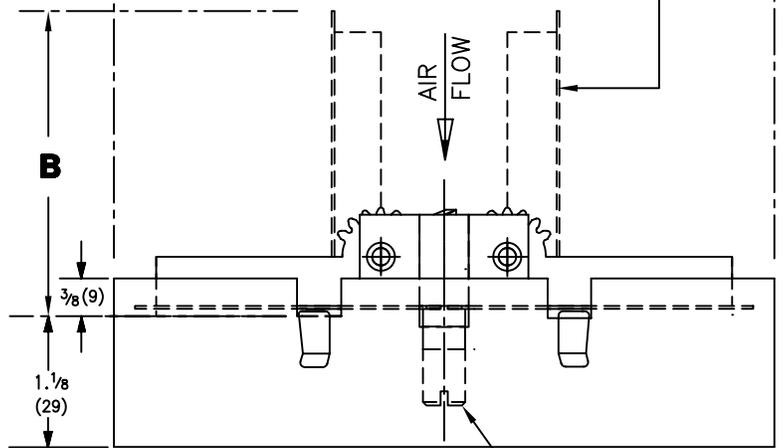

SIDE VIEW OF DAMPER

USE STD. FLAT BLADE SCREWDRIVER TO OPERATE DAMPER.

DUCT SIZE	IMPERIAL UNITS		S I UNITS	
	<b>A</b>	<b>B</b>	<b>A</b>	<b>B</b>
<b>4</b>	3 7/8	1 3/4	98	44
<b>5</b>	4 7/8	2 1/4	124	57
<b>6</b>	5 7/8	2 3/4	150	70
<b>7</b>	6 7/8	3 1/4	175	82
<b>8</b>	7 7/8	3 3/4	200	95
<b>10</b>	9 7/8	4 3/4	250	120
<b>12</b>	11 7/8	5 3/4	302	146
<b>14</b>	13 7/8	6 3/4	352	171
<b>15</b>	14 7/8	7 1/4	378	184
<b>16</b>	15 7/8	7 3/4	403	197

**NOTE:**

- MATERIAL = COATED STEEL-MILL FINISH
- DAMPER CONTROLS AIR VOLUME FROM FULL OPEN TO FULL CLOSED.
- DAMPER MOUNTS DIRECTLY INTO RIGID DUCT, SIZES 5 TO 16 HAVE 3-MTG. HOLES, SIZE 4 HAS 2-MOUNTING HOLES.
- RIGID DUCT APPLICATION ONLY.

ALL METRIC DIMENSIONS ( ) ARE SOFT CONVERTED. IMPERIAL DIMENSIONS ARE CONVERTED TO METRIC AND ROUNDED TO THE NEAREST MILLIMETER.

<b>PROJECT:</b>		<b>PRICE<sup>®</sup></b>	
<b>ENGINEER:</b>		RV	<b>VCR8</b> FULL FLOW DAMPER DUCT MOUNTED
<b>CUSTOMER:</b>		222756	
<b>SUBMITTAL DATE:</b>	<b>SPEC. SYMBOL:</b>	MAY 04	